


# FF-BH SERIES QUICK COUPLINGS (PLT4)

ISO 16028 - Flush Face - Bulkhead

Sizes: 1/2"

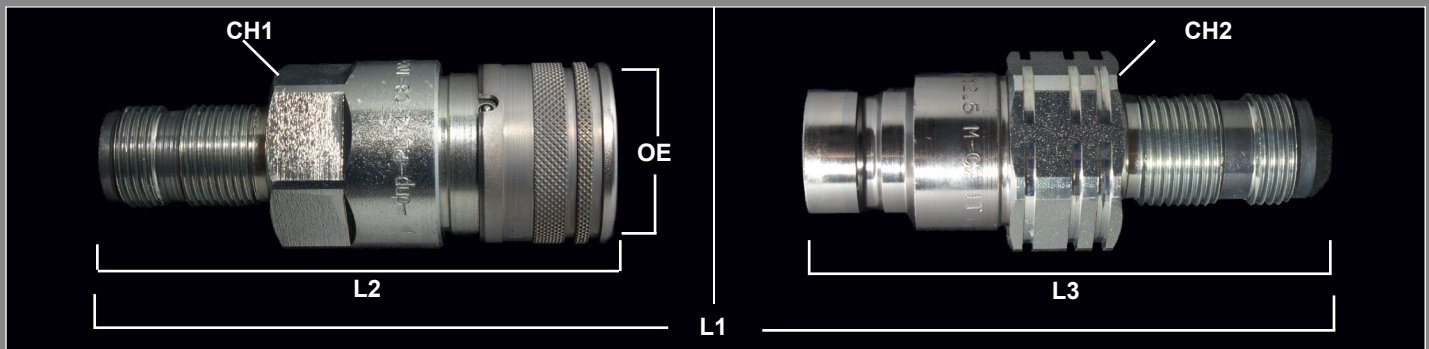

## Features and Applications

- High working pressures up to 5,075 PSI
- Sleeve locking device
- Locking radial balls
- Connection under pressure not allowed
- FF-BH series is ideal for markets where flat face, non-spill couplings are a must.
- Skid steers
- Skid steer attachments
- High pressure applications

## MATERIALS

Body: Carbon Steel  
 Finishing: Gray nickel plating  
 Seals: NBR standard seals  
 Threads: Bulkhead JIC and ORFS

## MAJOR INTERCHANGES

Parker FE           Faster FF / 2FFI  
 AeroquipFD89    Dixon HT  
 Snap Tite 74      Stucchi A  
 Safeway FF49

## DIMENSIONAL & PRESSURE RATING DATA

Body Size	CH1	CH2	OE	L1	L2	L3	Optimal Flow Rate (GPM)	Max Flow Rate (GPM)	Max Working (PSI)
08	1.063	1.063	1.496	3.778	2.756	1.890	12	23.78	5,075

units: inches

## Key Note:

- Color Safe System options available



## ORDERING INFORMATION

QUICK COUPLING PART NUMBERING SYSTEM:

**FF-BH - 08 - 10 - N - JIC**

