


FF-UHP7 SERIES QUICK COUPLINGS (PLT7)

Flush Face - Ultra High Pressure

Sizes: 1/4"

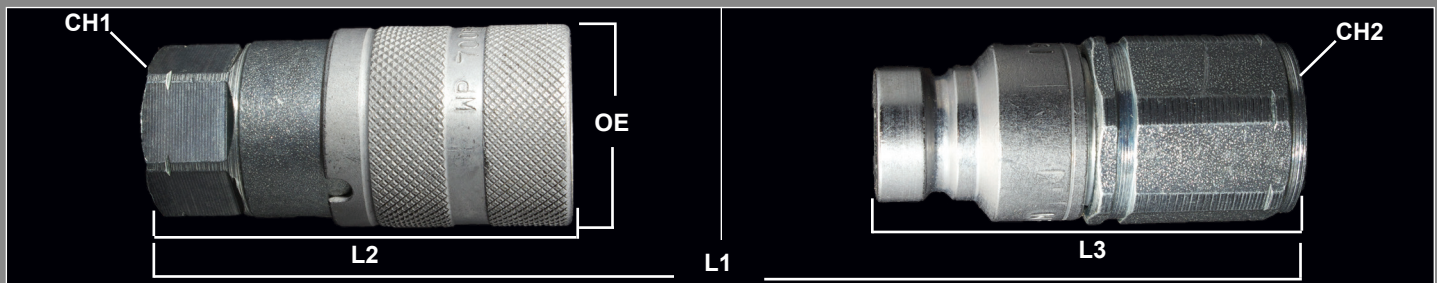

Features and Applications

- 10,000 PSI working pressure
- Will not interchange with ISO 16028 standard
- High resistance steel
- Sleeve locking device
- Locking radial balls
- Connection under pressure not allowed
- FF-UHP7 series is ideal for markets where flat face, non-spill couplings are a must.
- Torque tools
- Emergency systems
- High pressure jacks

MATERIALS

Body: Carbon Steel
 Finishing: Zinc nickel plating
 Seals: NBR standard seals
 Threads: NPT & BSP

MAJOR INTERCHANGES

Stucchi A-HP

DIMENSIONAL & PRESSURE RATING DATA

Body Size	CH1	CH2	OE	L1	L2	L3	Optimal Flow Rate (GPM)	Max Flow Rate (GPM)	Max Working (PSI)
04	.87	.87	1.10	4.0	2.30	2.10	6.35	6.34	10,290

units: inches

Key Note:

- Color Safe System options available



ORDERING INFORMATION

QUICK COUPLING PART NUMBERING SYSTEM:

FF-UHP7 - 04 - 04 - N - NPT

