


## Hot Oil Hose

### Hot Oil Hose

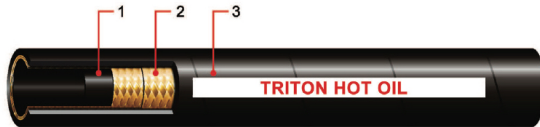

- 1- Black Chloroprene
- 2- Two Braids High Tensile Steel Wire
- 3- Black Chloroprene Cover

**Tube:** Black Chloroprene

**Reinforcement:** Two braids of high tensile steel wire

**Cover:** Black Chloroprene, wrapped finish

**Temperature:** -40° F / +275° F, Intermittent use up to 300° F

**Application:** Hot asphalt, glue, tar, oil, wax; In-plant transfer, delivery trucks, construction, and more

**Termination:** 200 series/ 1-piece fitting

### Key Note:

Part Number	Hose I.D.		Hose O.D.		Max Working Pressure	Minimum Burst Pressure	Minimum Bend Radius		Weight	Termination
	(in)	(mm)	(in)	(mm)			(in)	(mm)		
Hot Oil Hose-24	1-1/2"		1.98	50.4	2,250	6,750	13	330	1.59	200 series/1-piece