


Jack Hose/DIN-4SH

Jack Hose

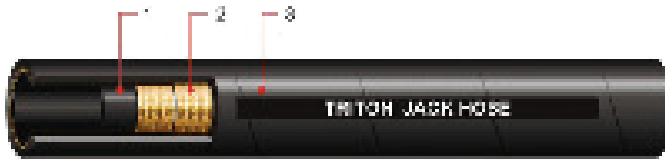

- 1- Synthetic Rubber Tube
- 2- Two High Tensile Steel Wire Spirals
- 3- Synthetic Rubber Cover

Tube: Oil resistant, synthetic rubber

Reinforcement: Two braids of high tensile steel wire

Cover: Oil and weather resistant synthetic rubber

Temperature: -40° F / +212° F, Intermittent use up to 250° F


Application: Hydraulic oil, water

Termination: 200 series, bite to wire, 1-piece fitting

Key Note: 10,000 PSI static pressures, hydraulic lifting jacks, hydrostatic testing

Part Number	Hose I.D.	Hose O.D.		Max Working Pressure	Minimum Burst Pressure	Minimum Bend Radius		Weight	Termination
	(in)	(in)	(mm)	(psi)	(psi)	(in)	(mm)	(lbs/ft)	Fitting Type
Jackhose-04	1/4"	.59	15	10,000	20,000	3.94	100	.22	200 series/1-piece
Jackhose-06	3/8"	.74	18.9	10,000	20,000	5.12	130	.34	200 series/1-piece

DIN-4SH

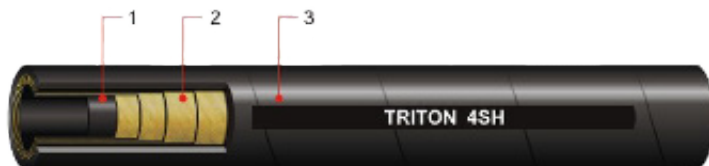

- 1- Synthetic Rubber Tube
- 2- Four High Tensile Steel Wire Spirals
- 3- Synthetic Rubber Cover

Tube: Oil resistant, synthetic rubber

Reinforcement: Four spirals of high tensile wire

Cover: Oil and weather resistant synthetic rubber

Temperature: -40° F / +212° F, Intermittent use up to 250° F

Application: Petroleum based hydraulic fluid, gasoline, water, diesel fuels, lubricating oils, glycol, mineral oils, and more

Termination: 400 xtrafit, 600 spiral fit, non skive, 1-piece fitting

Key Note: High impulse cycles

Part Number	Hose I.D.	Hose O.D.		Max Working Pressure	Minimum Burst Pressure	Minimum Bend Radius		Weight	Termination
	(in)	(in)	(mm)	(psi)	(psi)	(in)	(mm)	(lbs/ft)	Fitting Type
4SH-24	1-1/2"	2.16	55.1	4,205	16,820	22	560	2.42	400XF/600SF 1-piece
4SH-32	2"	2.74	69.7	3,625	14,500	27.95	710	3.36	400XF/600SF 1-piece