


OFW-Oilfield Workover, Hot Oil Hose

OFW-Oilfield Workover

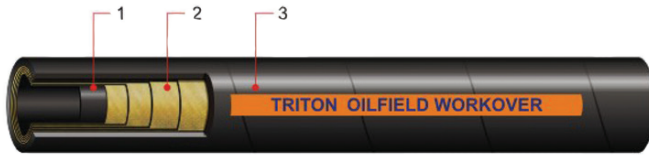

- 1- Synthetic Rubber Tube
- 2- Four High Tensile Steel Wire Spirals
- 3- Synthetic Rubber Cover

Tube: Oil resistant, synthetic rubber

Reinforcement: Four spirals of high tensile wire

Cover: Oil and weather resistant synthetic rubber

Temperature: -40° F / +212° F, Intermittent use up to 250° F


Application: Oilfield workover rigs and well servicing "Not to be used with hydraulic systems"

Termination: 400 series, non skive, 1-piece fitting

Key Note: 5,000 PSI working pressure with 2.9 to 1 safety factor when used on oilfield workover rigs and well servicing applications

Part Number	Hose I.D.	Hose O.D.		Max Working Pressure	Minimum Burst Pressure	Minimum Bend Radius		Weight	Termination
	(in)	(in)	(mm)	(psi)	(psi)	(in)	(mm)	(lbs/ft)	Fitting Type
OFW-32	2"	2.74	69.7	5,000	14,500	27.95	710	3.36	400/400XF/600SF series / 1-piece

Hot Oil Hose

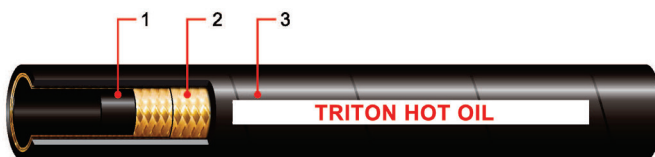

- 1- Black Chloroprene
- 2- Two Braids High Tensile Steel Wire
- 3- Black Chloroprene Cover

Tube: Black Chloroprene

Reinforcement: Two braids of high tensile steel wire

Cover: Black Chloroprene, wrapped finish

Temperature: -40° F / +275° F, Intermittent use up to 300° F

Application: Hot asphalt, glue, tar, oil, wax; In-plant transfer, delivery trucks, construction, and more

Termination: 200 series/ 1-piece fitting

Key Note:

Part Number	Hose I.D.	Hose O.D.		Max Working Pressure	Minimum Burst Pressure	Minimum Bend Radius		Weight	Termination
	(in)	(in)	(mm)	(psi)	(psi)	(in)	(mm)	(lbs/ft)	Fitting Type
Hot Oil Hose-24	1-1/2"	1.98	50.4	2,250	6,750	13	330	1.59	200 series/1-piece