


PPS / PPV/ANV-K SERIES QUICK COUPLINGS


Push Pull
Sizes: 1/2"



Coupler Available in
Ball & Poppet Style

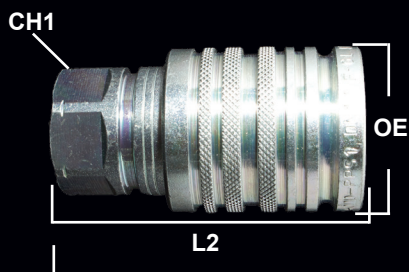

Nipple connect under
pressure available in
Poppet and Ball Style

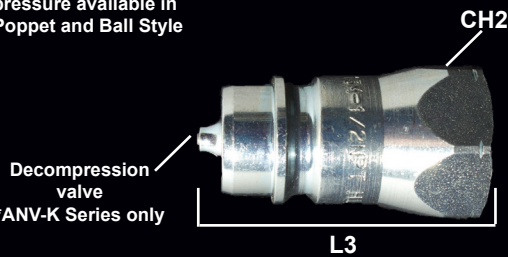

Decompression
valve
*ANV-K Series only

Features and Applications

- Ideal for mobile applications using hydraulic attachments
- PPS / PPV are designed to break away in case of accidental pulls
- One hand to connect and disconnect
- * ANV - K can be used with the PPV in cases where the implement has trapped pressures in the hydraulic lines

MATERIALS

Body: Carbon Steel
Finishing: ZN-Fe (CRIII) Plating
Seals: NBR standard seals
Threads: NPT, BSP, & Metric
* PPV interchanges with 1/2" NV Series

MAJOR INTERCHANGES

Parker 4000 Faster 3CPU
Aeroquip F72 Dixon AG
SnapTite 61 Stucchi IRS
Safeway S40

DIMENSIONAL & PRESSURE RATING DATA

PPS & ANV-K (Ball Style)

Body Size	CH1	CH2	OE	L1	L2	L3	Optimal FlowRate (GPM)	Max Flow Rate (GPM)	Max Working (PSI)
08	1.063	1.063	1.496	3.78	2.756	1.890	11.89	14.53	2,490

DIMENSIONAL & PRESSURE RATING DATA

PPV & ANV-K (Poppet Style)

Body Size	CH1	CH2	OE	L1	L2	L3	Optimal Flow Rate (GPM)	Max Flow Rate (GPM)	Max Working (PSI)
08	1.063	1.063	1.496	3.78	2.756	1.890	11.89	23.78	3,675

units: inches

ORDERING INFORMATION

QUICK COUPLING PART NUMBERING SYSTEM:

PPS - 08 - 08 - C - NPT

PPS/PPV/ANV-K SERIES	
PPV	Poppet Push-Pull Coupler
PPS	Ball Push-Pull Coupler
ANV-K	Connect under pressure Poppet Style Nipple
NSK	Connect under pressure Ball Style Nipple

Body Size	
08	1/2"

Thread Size	
08	1/2"

Coupler / Nipple	
C	Coupler
N	Nipple

Thread Type	
NPT	NPT