


# Torque Wrench Market Edition



DNP Americas  
860 FM 517  
Alvin, TX 77511  
Office: 281-388-0253  
Fax: 281-388-1902  
[www.dnpamericas.com](http://www.dnpamericas.com)



## Torque Hose - single line

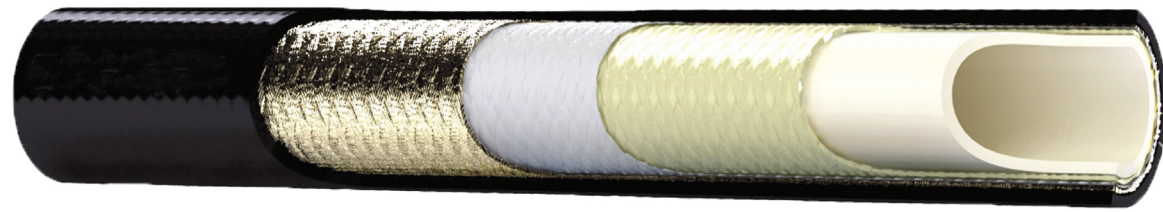


- 4 to 1 safety factor
- 10,000 PSI
- End Fittings: NPT, BSPP, 9/16 Type M
- Size: 1/4"

## Torque Hose - twin line



- 4 to 1 safety factor
- 10,000 PSI
- End Fittings: NPT, BSPP, 9/16 Type M
- Size: 1/4"

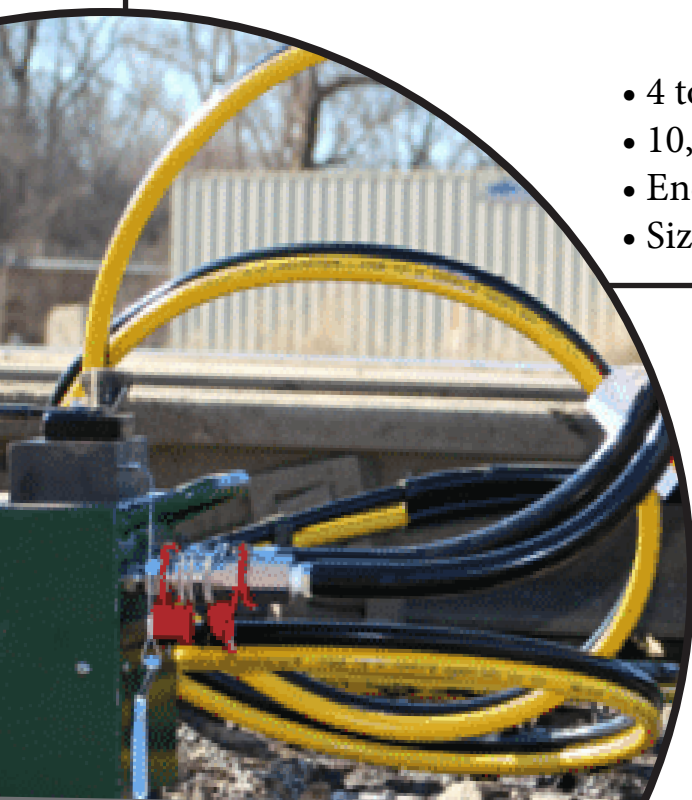

## PLT6/PLT7 Couplings




- 10,000 PSI working pressure
- High resistance steel
- Sleeve locking device
- Locking radial balls
- Emergency systems
- High pressure jacks
- Connection under pressure not allowed

## Cejn 115/116 Style Couplings



- Flat face design
- Non-drip on connection / disconnection
- Caps included
- One handed operation
- High working pressures

## UHP Valves & Adapters

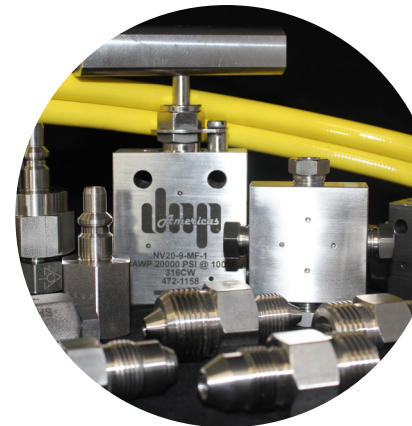

Needle Valves, Ball Valves,  
Check Valves, Adapters

- 316 Stainless Steel options
- 10,000 - 60,000 PSI

## PVS Couplings



- High pressure jacks
- Torque equipment
- 10,000 PSI
- Ball style / poppet style

