


Waterblast Hose, Push Lock Hose (100R6)

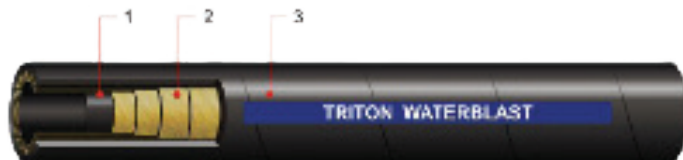


- 1- Synthetic Rubber Tube
- 2- Four High Tensile Steel Wire Spirals
- 3- Synthetic Rubber Cover

Tube: Oil resistant, synthetic rubber
Reinforcement: Multiple Spiral Technology
Cover: Oil and weather resistant synthetic rubber
Temperature: -40° F / +213° F, Intermittent use up to 250° F
Application: Waterblasting market
Termination: WB series, interlock, external/internal skive, 2-piece fittings

Key Note: Waterblasting market

Part Number	Hose I.D.	Hose O.D.		Max Working Pressure	Minimum Burst Pressure	Minimum Bend Radius		Weight	Termination
	(in)	(in)	(mm)	(psi)	(psi)	(in)	(mm)	(lbs/ft)	Fitting Type
WB-08-15K	1/2"	.91	23	15,000	37,500	3.15	80	.61	WB/2-piece

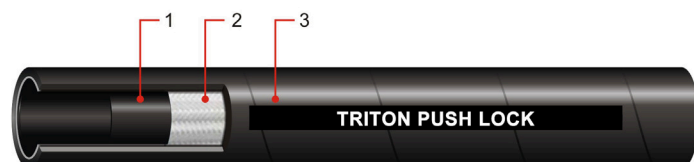

- 1- Synthetic Rubber Tube
- 2- One Braid of Textile
- 3- Synthetic Rubber Cover

Tube: Oil resistant, synthetic rubber
Reinforcement: One braid of textile
Cover: Oil and weather resistant synthetic rubber
Temperature: -40° F / +212° F, Intermittent use up to 250° F
Application: Petroleum based hydraulic fluid, gasoline, water, diesel fuels, lubricating oils, glycol, mineral oils, and more
Termination: 200 series, bite to wire, 1-piece fitting

Key Note: Wide range of standard hydraulic use

Part Number	Hose I.D.	Hose O.D.		Max Working Pressure	Minimum Burst Pressure	Minimum Bend Radius		Weight	Termination
	(in)	(in)	(mm)	(psi)	(psi)	(in)	(mm)	(lbs/ft)	Fitting Type
PLH-04	1/4"	.49	12.5	410	1,620	2.6	65	.09	200 series/1-piece
PLH-05	5/16"	.55	14.0	410	1,620	3.0	75	.10	200 series/1-piece
PLH-06	3/8"	.62	15.7	410	1,620	3.0	75	.12	200 series/1-piece
PLH-08	1/2"	.77	19.5	410	1,620	3.9	100	.17	200 series/1-piece
PLH-10	5/8"	.90	22.9	350	1,420	4.9	125	.21	200 series/1-piece
PLH-12	3/4"	1.02	26.0	310	1,220	5.9	150	.27	200 series/1-piece