


100R4-Flex/4

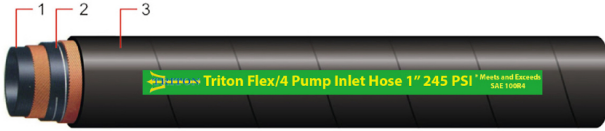

- 1- Synthetic Rubber Tube
- 2- High Tensile Steel Wire Braids
- 3- Synthetic Rubber Cover

Tube: Oil Resistant, NBR/Synthetic Blend Rubber
Cover: Oil Resistant, NBR/Synthetic Blend Compound. Abrasion and weather resistant.
Reinforcement: Multiple layers of high tensile cord supported with Helix wire and embedded with anti static copper wire.
Surface: Wrapped finish
Tolerance: ISO 1307
Temperature: -40° F to 212°F
Termination:

Key Note: Half Bend Radius, Compact Pump Inlet Hose

Part Number	Hose I.D.	Hose O.D.		Max Working Pressure	Minimum Burst Pressure	Minimum Bend Radius		Weight	Termination
	(in)	(in)	(mm)			(psi)	(in)		
Flex4-12	3/4"	1.15	29.25	300	1200	1.50	38	.389	R4F4 Series/ 1-piece
Flex4-16	1"	1.45	37.05	245	980	2.00	50.8	.463	R4F4 Series/ 1-piece
Flex4-20	1-1/4"	1.70	43.20	188	752	2.51	63.6	.584	R4F4 Series/ 1-piece
Flex4-24	1-1/2"	1.98	50.50	150	600	3.00	76.2	.705	R4F4 Series/ 1-piece
Flex4-32	2"	2.53	64.30	120	480	4.00	101.6	1.048	100 Series/ 1-piece
Flex4-40	2-1/2"	3.03	77.00	105	420	5.00	127	1.37	100 Series/ 1-piece
Flex4-48	3"	3.47	88.30	75	300	6.00	152.4	1.827	100 Series/ 1-piece