


FF-71 Series (PLS1)

High Pressure Flat Face

Sizes: 1/4" - 1"

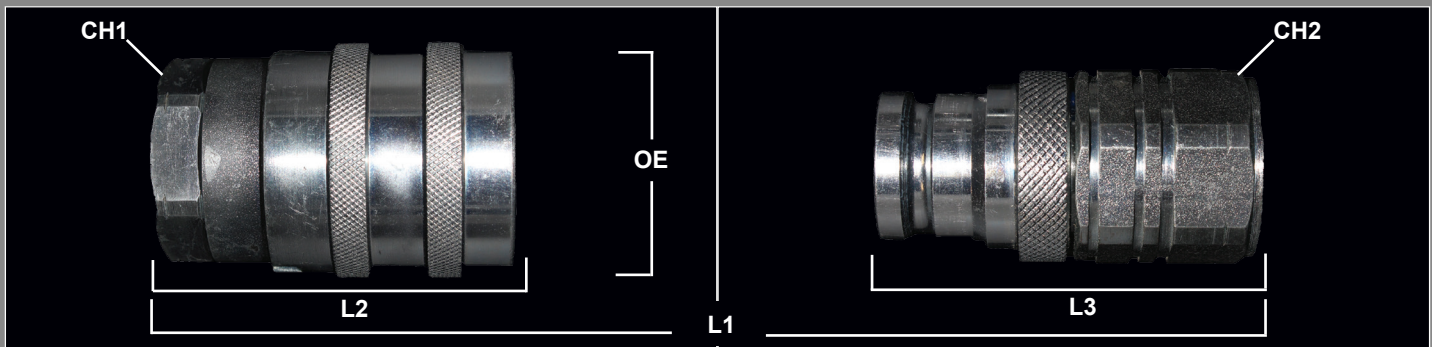

Features and Applications

- High pressure flat face
- Locking radial balls
- Sleeve lock
- Connection under pressure not allowed
- Non-spill

MATERIALS

Body: Carbon Steel
 Finishing: Zn-Fe (CR111)
 Seals: NBR Standard Seals
 Threads: NPT

MAJOR INTERCHANGES

Parker/Snap-Tite 71 Series
 Dixon ST Series

* Larger Bore Sizes Available
 Upon Request

DIMENSIONAL & PRESSURE RATING DATA

Body Size	CH1	CH2	OE	L1	L2	L3	Optimal Flow Rate (GPM)	Max Flow Rate (GPM)	Max Working (PSI)
04	.94	.86	1.18	3.64	2.04	2.13	2.50	5.3	5,075
06	1.18	1.18	1.57	4.13	2.43	2.40	6	12	5,075
08	1.49	1.41	1.89	5.04	2.80	2.95	10	16	5,075
12	1.81	1.61	2.28	5.62	3.11	3.43	25	40	5,075
16	1.96	1.96	2.68	6.10	3.46	3.60	47	63	5,075

units: inches

Key Note:

- Color Safe System options available



ORDERING INFORMATION

QUICK COUPLING PART NUMBERING SYSTEM:

FF-71 - 08 - 08 - C - NPT

